


# PLASTICS

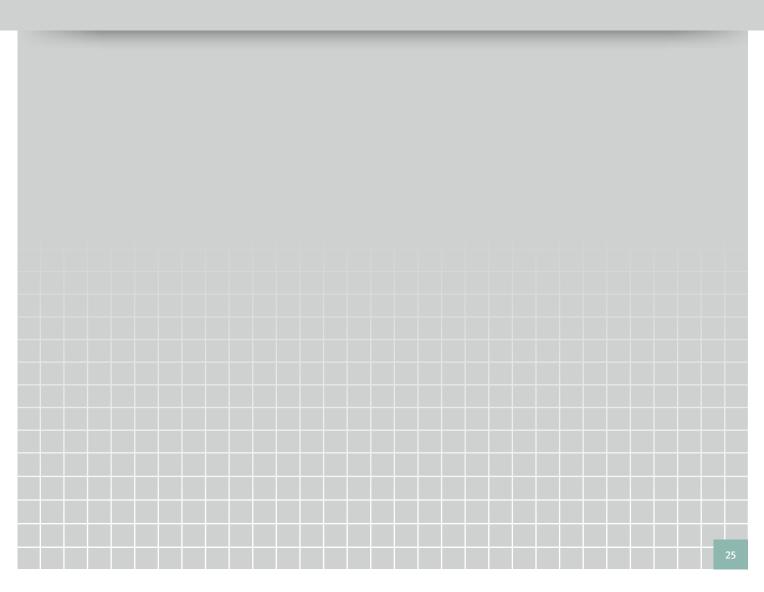

# PLASTICS – TABLE OF CONTENTS

Introduction		27
Food Safe Plastics		28 – 29
Technical Plastics		30 – 49
	Original Material "S"® green/natural	30
	Original Material "S"® black	31
	Material "S"®8000	32
	Material "S"®1000 / Material "S"®1000 RB	33
	Original Material "S"®plus + FP [FS]	34
	Original Material "S"®plus + LF 😡	35
	Original Material "S"®plus + LF ESD	36
	Original Material "S"®plus + AB	37
	Original Material "S"®plus + TLS 😡	38
	Original Material "S"®plus + GB	39
	Original Material "S"®plus + ESD	40
	Original Material "S"®plus + Bright ESD	41
	Muralen® / Muralen® plus + AB 🕡 / Muralen® black	42
	Murlubric® / Murlubric® blue [FS] 😡	43
	Murylon®B 👽 / Murylon®A 👽	44
	Murylon®AGF / Murylon®6 Cast	45
	Murdopol <sup>®</sup>	46
	Murytal®C 😡 / Murytal®C natural [FS] / Murytal®C blue [FS] 😡 / Murytal®H / Murytal®ESD	47 – 48
	Murylat® / Murylat®SP 👽	49
"High-Performance" Plastics		50 – 56
	Murylon®HT	50
	Murinyl®	51
	Murflor®	52
	Murflor® + Carbon / Murflor® + Bronze	53
	Murinit® SP 😨	54
	Murpec® 👽 / Murpec®SP	55 – 56

PLASTICS

# The best material for every application

Our range constitutes the basis for optimized machining and production processes and includes specially designed materials that are carefully tuned for use in an extremely wide range of applications.

# The most important factors of our materials' success

- Excellent slide properties
- High wear resistance
- Great mechanical and chemical resistance
- Long lifetime

### Our service

- Pre-cut custom parts from sheets and rods
- Individual solutions
- Large warehouse stock of semifinished parts with different dimensions
- Short delivery times thanks to ample warehouse capacities



# Plastics for use in the food industry

EC Regulation 10/2011, which has been in force since 2011, currently forms part of EC Regulation 1935/2004. It stipulates rules for dealing with materials and items made from plastic and intended to come into contact with foods. Murtfeldt has certified its relevant plastics and now indicates materials which are suitable for contact with foods using the letters [FS] "Food Safe".



# **Technical Plastics**

Each sector and application has specific requirements for machines and plants. Quality is important in even the smallest components, since it influences subsequent production and machining processes. We have always concentrated on the task of developing forward-looking products for a wide application spectrum. Our technical materials are primarily characterized by good slide properties and high wear resistance. This means that we are able to guarantee a long lifetime for our materials and low maintenance requirements for your plants.



# **High-Performance Plastics**

Our high-performance materials are designed to meet unusual requirements and high stresses and stains. They are the result of the consistent development of our technical materials. They are characterized by exceptional chemical, mechanical, and thermal resistance and resilience in situations of dynamic stress. Murtfeldt high-performance materials are therefore ideally suited for extremely customized tasks.



# "S"®plus + Family

The material "S" plus + Family developed by Murtfeldt is a new group of plastics designed for your specific applications and for the very highest demands. Made from high-quality UHMW polyethylene, they all offer specific properties for diverse fields of application.

# FOOD SAFE PRODUCTS FOOD SAFE [FS]

# REGULATION EC 1935/2004

There are risks involved in the interaction of foods and impurities, and these risks must be kept to a minimum. Since 2004, Regulation EC 1935/2004 – which is still in force today –has governed these risks. Its most important relevant statement here: Raw materials and items must be manufactured in a way that ensures that – in normal, foreseeable usage conditions – their components only pass into foods in levels that cannot endanger the health of the consumer.

# **NEW: REGULATION EC 10/2011**

In January 2011, the European Commission adopted a new regulation on materials and items made from plastic and intended to come into contact with foods. This new regulation – Regulation EC 10/2011 – is in force since the 1st of May 2011 and forms part of EC Regulation 1935/2004.

# Its most important content?

A list of source materials (monomers) and a list of auxiliary materials (additives) that can be used to manufacture plastics

Migration processes based on limit values and purity specifications

Conformity declarations

Batch tracking

Manufacturing as per EC 2023/2006 (Good Manufacturing Practice)

# LET'S GET DOWN TO THE NITTY-GRITTY!

# Which source materials and additives can be used?

The substance lists for monomers and additives contain a total of 885 source materials that are approved at EU level. Only these substances may be used to manufacture materials and plastic products in accordance with their specific migration values.

# THE MIGRATION PROCESS

For plastics, there are substance-specific limit values for the transition of these substances to foods. These are called "migration values". These values are determined by means of migration tests that are carried out by independent institutions. If the result of a migration process is successful, the manufacturer is entitled to issue the required certificate of conformity for the outgoing goods.

A declaration of conformity is valid until changes are made to the composition of the material or to the production process that consequently alter the migration of substances from the material or plastic product or until new scientific knowledge is available. The migration process consists of two tests:

The overall migration limit test (OML) and the specific migration limit test (SML). In the case of the overall migration limit, the total of all migrating substances may not exceed 60 ppm. The specific migration test determines specific migration values for individual monomers and additives cited in the regulation on plastics.





# THE DECLARATION OF CONFORMITY

In accordance with the stipulations of the new EU regulation, each manufacturer or importer of commodities that are made from plastic and that come into contact with foods must enclose a written declaration of conformity with each product.

The main aim of this declaration of conformity is to enable the easy identification and thus traceability of the used materials for which it is issued. It should ensure that there is sufficient information on the substances used and their decomposition products over the entire supply chain as well as information on the use of the material.

# THE TRACEABILITY

In other words: Where did the plastic come from? And where is it going to? The following was mentioned already in the section on the declaration of conformity: Traceability. This refers to the mandatory requirement to identify an item and enable the tracing of its manufacturing, processing, and sales stages. In each case, at least one prior and one subsequent stage must be identifiable. This is achieved by labelling the plastic and placing information on the manufacturer, date of production, production process etc. on the label.

# GOOD MANUFACTURING PRACTICE (GMP)

Good Manufacturing Practice (GMP) – which means ensuring good production by means of quality assurance – emanates from Regulation EC 2023/2006, which is embedded in Regulation EC 1935/2004. According to this concept, manufacturing is a part of a quality system that ensures the safe and traceable production of products in the pharmaceutical and food industries. In practice, an ISO quality system that is already in place must be supplemented by the GMP directives.

From now on, [FS] ("food-safe") will be added to the names of these products. In addition, on request Murtfeldt is able to carry out individual migration tests for customers for other colours or types of technical plastic.



Overview of Murtfeldt PE plastics that are approved for use in the food industry as per Regulation EC 1935/2004

Original Material "S"® green [FS]

Original Material "S"® black [FS]

Original Material "S"® natural [FS]

Muralen® natural [FS]

Muralen® plus+AB [FS]

Original Material "S"® plus+AB [FS]

Original Material "S"® plus+TLS [FS]

Original Material "S"® plus+LF [FS]

Original Material "S"® plus+LF [FS]

Overview of Murtfeldt technical plastics that are approved for use in the food industry as per Regulation EC 1935/2004

Original Material "S"® plus+FP [FS]

Murylon® B natural [FS]

Murylon® A natural [FS]

Murytal® C natural [FS]

Murytal® C blue [FS]

Overview of Murtfeldt high-performance plastics that are approved for use in the food industry as per Regulation EC 1935/2004

Murylat® [FS]

Murylat® SP [FS]

Murinit SP [FS]

Murpec® natural [FS]



# ORIGINAL MATERIAL "S"® green/natural (5) ORIGINAL MATERIAL "S"® green/natural (FS) (5) (5)



Since the 1950s, Material "S" has been tried and tested a thousand times over for a wide range of applications in power engineering and conveyor technology.

Material "S"® is based on virgin, ultrahigh molecular weight low pressure polyethylene and significantly exceeds the requirements of DIN 16972.

Original Material "S"® is one of the most successful groups of materials in the industrial plastics sector.


In particular, Original Material "S"® green has established itself as a branded product in the plastics sector. It is used in all applications where a technical, high-performance plastic is required. Original Material "S"® green is synonymous with excellent slide properties, high wear resistance, and a long lifetime.


### SPECIAL PROPERTIES

- Extremely high wear resistance even in abrasive applications
- Excellent slide properties
- High impact strength
- Extremely good resistance to chemicals
- Excellent shock and impact absorption
- Good anti-adhesion properties
- No moisture absorption
- Available in all RAL colours (minimum purchase quantity of 600kg for materials not kept on stock)

- Electrically isolating ("S" Green, Natural, and colours)
- Approved for use in the food industry (EU and FDA)
- Original Material "S"® is also available with a molecular weight of up to 9 million g/mol.

- Slide bearings
- Chain guides
- Highly wear-resistant antistatic slide segments
- Slide profiles

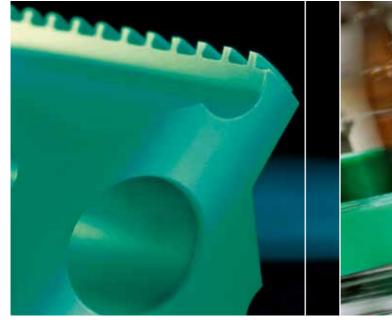

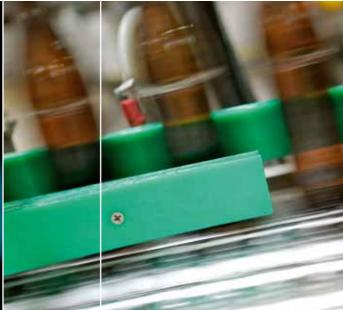

# ORIGINAL MATERIAL "S"® black ORIGINAL MATERIAL "S"® black [FS]



Original Material "S"® black has the same properties as Original Material "S"® green/natural. In addition, it is also electrostatically conductive due to the addition of additives.

# SPECIAL PROPERTIES

- Extremely high wear resistance even in abrasive applications
- Antistatic
- **■** Excellent slide properties
- High impact strength
- Very good resistance to chemicals
- Excellent impact/shock resistance
- Good anti-adhesion properties
- No moisture absorption
- Suitable for all devices and machines that are subject to Directive 94/9/EC (ATEX 95)

- Belt guides
- Highly wear-resistant antistatic slide segments
- Slide profiles



# MATERIAL "S"® 8000

This material results from the further development of a tried-and-tested material. Experiences of over 50 years of producing Original Material "S"® have contributed to the development of this material. This involved improving already impressive material properties. For example, the self-lubricating character of this material has resulted in an improved sliding friction coefficient in comparison with Original Material "S". Original Material "S"® 8000 is ideally suited for use in sliding guides, slide segments, and slide bearings.

### **SPECIAL PROPERTIES**

- Self-lubricating lower sliding friction coefficient
- Increased wear resistance
- **■** Excellent impact/shock resistance
- Good resistance to chemicals
- Good anti-adhesion properties
- **■** Electrically isolating
- Better resistance to UV rays than Original Material "S"® green/natural

- Highly wear-resistant slide elements
- Sliding guides, slide segments, and sliding bearings



PLASTICS

This material is exclusively produced from ultra-high molecular weight polyethylene powder that is mixed with finely milled Original Material "S"®. The mixing process is computer-monitored. The fine milled material is compression-moulded at high pressure and temperatures to form new semi-finished products. This results in a high-quality material with an exceptional price/performance ratio that is characterized by exceptional abrasion resistance and good slide properties. Material "S"® 1000 is physiologically safe.

## SPECIAL PROPERTIES

- Good wear resistance properties
- Good slide properties
- Good anti-adhesion properties
- No moisture absorption
- Electrically isolating (Original Material "S"® 1000 green)
- Antistatic (Original Material "S"® 1000 black)
- Economical environmentally friendly

An elastomer in this material is what makes it so unique. Instead of the excellent sliding ability for which Murtfeldt is best known, it comes into its own in applications where impact resistance and skid resistance are called for. Material "S"® 1000 RB has a further key use wherever strong abrasive forces are at work. High levels of wear and tear

### **SPECIAL PROPERTIES**

■ High coefficient of friction

pose no problem for this plastic.

■ Good wear and abrasion resistance

# **POSSIBILITIES OF USE**

- Slide bearings
- Chain guides
- Wear-resistant slide segments
- Slide profiles

- Ideally suited for use where products will be subjected to knocks and impacts
- As a base for cranes or as a support base for heavy construction equipment



# ORIGINAL MATERIAL "S"® plus+ FP [FS] 🛍 🔂

Member of the "S"® plus+ family



Original Material "S"® plus+FP[FS] is a new technical plastic that completely meets the requirements of the food sector for the detectability of plastic foreign bodies in foods. "FP" stands for "food protect" and embodies two vital properties: This product is both food-safe and metal-detectable. Metallic foreign bodies in foods are safely detected by metal detectors and removed. However, plastic particles from plant components can be problematic. Thanks to the use of additives in Original Material "S"® plus+FP[FS], all commonly used metal detectors in the food industry can now detect and remove plastic particles.

### **SPECIAL PROPERTIES**

- Metal-detectable in all commonly used industrial detectors
- Approved for use in the food industry (EU and FDA)
- Very good wear and abrasion resistance
- Extremely good machinability
- **■** Excellent chemical resistance
- Increased continuous use temperature of 100°

### **POSSIBILITIES OF USE**

- Curve and chain guides, slide bars, or components used for food production/in the beverage industry
- Slide and drive elements in medical and food technology
- In all areas where hygiene and metal-detectability are required

### Information on its use

The detection capability of Original Material "S"® plus + FP [FS] is determined by the "product effect" of the products to be tested and the sensitivity of the detector. As a precise adjustment of your detector is required, we will be happy to send you test samples of our Original Material "S"® plus + FP [FS].



# ORIGINAL MATERIAL "S"® plus+ LF (FS) (ID) (FS)

Member of the "S"® plus+ family



When developing this material Murtfeldt managed to further slash the sliding friction coefficient by half. The particularly great feature of this material is that this value is constant and is achieved even at low friction intensities. The required driving force is drastically reduced, meaning that your motors need less energy and are thus significantly more economical to run. This innovative material enables an increased machine running speed at the same time as less abrasion and thus a lower maintenance requirement. As a result, the material significantly contributes to an increase in your productivity.

### SPECIAL PROPERTIES

- Constantly low sliding friction coefficient during operation
- Energy saving of up to 50 %
- No stick/slip effect
- Self-lubricating
- Protects the sliding partner
- Excellent acoustic insulation
- No water absorption
- Reduction in drive power with no reduction in performance
- Approved for use in the food industry (EU and FDA)

- **■** Guides for PET bottle conveyors
- Ideal wherever high slide speeds are required



# ORIGINAL MATERIAL "S"® plus+ LF ESD ORIGINAL MATERIAL "S"® plus+ LF ESD [FS]

Member of the "S"® plus+ family




The use of this plastic saves energy and improves the efficiency of your machines thanks to its low friction resistance. The sliding friction coefficient is reduced by up to 50 percent with this material – and so too the energy consumption for the drive power required. This plastic offers real energy-saving potential. Thanks to the additive used, Original Material "S"® plus+ LF ESD is electrically conductive, enabling voltage to be dissipated at maximum speed with the same maximum friction resistance.

## **SPECIAL PROPERTIES**

- Extremely high conductivity
- Voltage dissipation on the surface in less than 0.1s
- Reduction in drive power with no reduction in performance
- Saves up to 50 % energy
- Minimal and constant sliding friction coefficient even in continuous operation
- Self-lubricating
- Approved for use in the food industry (EU and/or FDA)

- As a solid sliding base in the semiconductor industry
- For modular chain and conveyor belts
- Guides for PET bottle conveyors
- As workpiece carriers for sensitive electronic components
- Guides and slide elements for machine construction

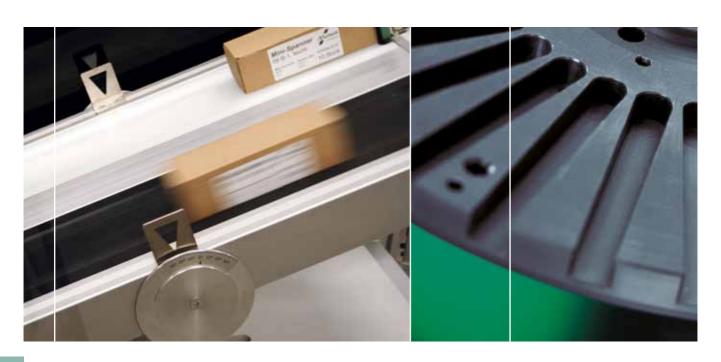

# ORIGINAL MATERIAL "S" plus+ AB ORIGINAL MATERIAL "S" plus+ AB [FS]

Member of the "S"® plus+ family



Material "S"® plus + AB contains special substances that prevent the growth of bacteria and other microbes at the same time as protecting the environment and people. The material is thus ideally suited for use when manufacturing and processing foods. It can reduce the growth of microbes on surfaces by between 99.96 to 99.99% in comparison with materials with no special additives. This means that it can virtually eradicate unpleasant smells and the formation of biofilms. "S"® plus+ AB combines antibacterial properties with the exceptional characteristics of the "S"® plus+ range.

### SPECIAL PROPERTIES

- Reduces bacteria and microbe growth by around 99.99 %
- Approved for use in the food industry (EU and FDA)
- High wear resistance
- Long lifetime
- **■** Good resistance to chemicals
- Good acoustic insulation
- No moisture absorption

- Curve and chain guides and slide bars or components in the food and beverage industry (especially in the meat sector and in dairies and breweries)
- Slide and drive elements in medical and food technology
- In areas where high standards of hygiene are required, such as the storage and handling of food, cosmetics, and drugs



# ORIGINAL MATERIAL "S"® plus+ TLS ORIGINAL MATERIAL "S"® plus+ TLS [FS]

Member of the "S"® plus+ family



Industrial applications are often subject to high temperatures at which Original Material "S"® could previously not be used. Such applications require materials with familiar characteristics such as wear, impact, and chemical resistance. The new Original Material "S"® plus+ TLS now offers – for the first time – a material that can be used in situations for which Original Material "S"® was not suited. Even at high operating temperatures of up to 120°C for short periods of time and constant service temperatures of up to 100°C, the molecular structure of this ultra-high molecular weight low-density polyethylene does not change. This is because the thermal oxidation point has been increased through the use of a newly developed additive. "S"® plus+ TLS is thus suitable for a wide range of industrial applications that are subject to sustained high temperatures.

### **SPECIAL PROPERTIES**

- Increased constant service temperature of 100° C
- Extremely good wear and abrasion resistance
- **■** Excellent resistance to chemicals
- Excellent machinability

### **POSSIBILITIES OF USE**

Slide and guide elements for many different industrial applications in the middle temperature ranges, e.g. drying ovens and chain trough conveyors.



# ORIGINAL MATERIAL "S"® plus+ GB


# Member of the "S"® plus+ family

This material is used for applications that involve manufacturing and transportation at high pressure. The balanced quantity of micro glass beads in Material "S"® plus+GB provides the combined benefits of extremely high molecular weight polyethylene and glass. The glass beads that protrude from the surface give a rounded and hard sliding surface.

### SPECIAL PROPERTIES

- Protects the sliding partner (unlike glass-fibre reinforced plastics)
- Extremely good resistance to chemicals
- Approved for use in the food industry (EU and FDA)

- Guides for PET bottlenecks in the beverage industry
- In abrasive environments (for example, environments where lint is present)

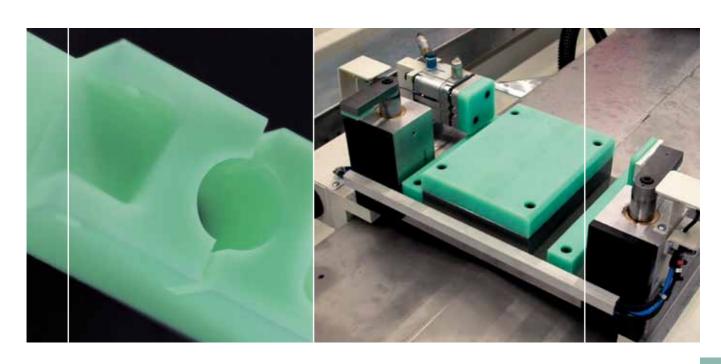

# ORIGINAL MATERIAL "S"® plus+ ESD 👼

Member of the "S"® plus+ family

Thanks to its extremely low electrical resistance, Material "S"® plus+ ESD is an optimum conductor. Full voltage dissipation for earthed components at maximum speed enables safe, spark-free work. This material provides a cost-effective alternative to carbon-filled PTFE.

### **SPECIAL PROPERTIES**

- Very good conductivity (surface resistance of < 10<sup>4</sup>Ω)
- Voltage dissipation on surface in less than 0.1s
- Cost-effective alternative to carbonfilled PTFE
- Suitable for devices and machines subject to Directive 94/9/EC (ATEX 95)
- Approved for use in the food industry (EU and FDA)

- In the automotive and semiconductor sectors as, for example, full-surface sliding bases for modular link belts
- As work piece carriers for sensitive electronic components



# ORIGINAL MATERIAL "S"® plus + Bright ESD

# Member of the "S"® plus+ family


For the first time, it has been possible to develop a light plastic with high conductivity and a voltage-dissipating effect on earthed components. This combination was not previously possible. This material is ideal for use in applications where a high value is placed on hygiene and antistatic characteristics.

In many work environments, light surfaces are mandatory. The conductivity of Material "S"® plus+ Bright ESD provides optimum safety. Its properties largely match those of Material "S"® plus+ ESD.

# **SPECIAL PROPERTIES**

- Very good conductivity (surface resistance of  $\leq 10^5 \Omega$ )
- Ideally suited to light, dust-free environments
- Suitable for devices and machines subject to Directive 94/9/EC (ATEX 95)

- Clean room technology
- Medicine
- Laboratories

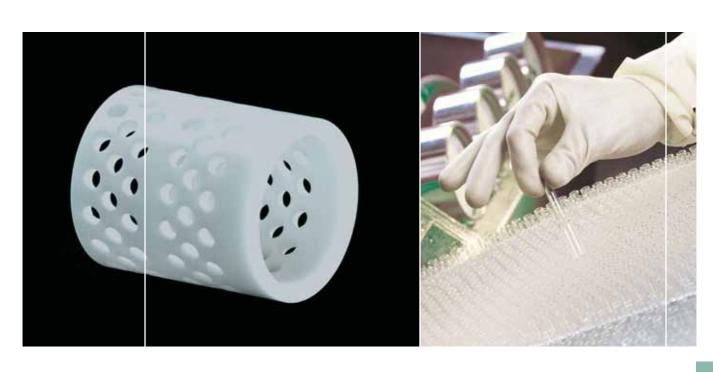



# MURALEN® PLUS+ AB MURALEN® MURALEN® PLUS+ AB [FS] black antistatic

Muralen® is based on high molecular weight polyethylene (PE-HMW) and is ideally suited for use in applications that require the generally impressive material properties of polyethylene. However, it is only used in cases where the excellent slide and wear resistance properties of Original Material "S"® are not required. Because of its great cut, impact, and shock resistance, this material is often used to make underlays for cutting and punching machines and for ram guards.

This material has the same properties as Muralen® but also has an antimicrobial effect.

This material has the same properties as Muralen® but also has an antistatic effect.

### **SPECIAL PROPERTIES**

- High cut resistance
- Good shock and impact absorption
- Good resistance to chemicals
- Good anti-adhesion properties
- Approved for use in the food industry (EU and FDA)
- Available in all RAL colours (minimum purchase quantity of 600kg for materials not kept on stock)
- Good weldability
- Antibacterial properties (Muralen® plus+ AB)
- Antistatic (Muralen® Black)

- Chopping boards/underlays for cutting machines
- Ram guards in supermarkets, cold stores, and abattoirs



# MURLUBRIC®

# MURLUBRIC® blue [FS] &

Mineral oil is integrated into this modified cast polyamide during polymerization.
As a result, the material has self-lubricating properties and retains its excellent characteristics for its entire lifetime. This significantly reduces operating and maintenance costs.

This material has practically the best slide properties of our entire range. In addition, Murlubric® is extremely wear-resistant and is suitable for use in high-stress slide and wearing applications even at high speeds.

Murlubric® blue [FS] is approved for use in the food industry (EU and FDA) compared with black Murlubric®.

### SPECIAL PROPERTIES

- Excellent slide properties
- Wear-resistant, even in abrasive applications
- High mechanical strength
- Self-lubricating
- Vibration-free running
- Low residual stress
- Good lubricant resistance
- High dynamic load-bearing capacity
- Approved for use in the food industry (EU and FDA)

- Rollers
- Highly-stressed slide elements (lifetime is 5 to 10 times longer than for normal polyamide)
- Chain guide rails
- Radial sliding bearings
- Murlubric® blue [FS] is approved for use in the food industry (FDA)



# MURYLON® B

# MURYLON® A 👼 MURYLON® B natural [FS] MURYLON® A natural [FS] (EU) (ED)

Murylon® B natural has the best impact resistance of all Murylon materials. This material is especially suited for use in machine construction thanks to an excellent combination of mechanical properties.

This material combines the excellent properties of the Murylon® range with additional high tensile and compressive strength, increased wear resistance, and a lower level of moisture absorption than Murylon® B.

# **POSSIBILITIES OF USE**

- Rollers
- Slide bearings
- Slide elements
- Components under varying stress
- Parts subject to high impacts and shocks

# **SPECIAL PROPERTIES**

- Exceptional resistance
- Good impact strength
- Low cold flow characteristics
- Approved for use in the food industry (EU and FDA)

# **POSSIBILITIES OF USE**

- Rollers
- Slide bearings
- Parts subject to high impacts and shocks

# **SPECIAL PROPERTIES**

- Better wear resistance than Murylon® B
- Improved tensile and compressive strength
- Better temperature resistance than Murylon® B
- Extremely good fatigue strength
- Low cold flow characteristics
- Approved for use in the food industry (EU and FDA)





# MURYLON® A GF

# MURYLON® 6 Cast

The properties of this material surpass the already impressive characteristics of Murylon® A. This is possible thanks to admixed glass fibres. The result: a clear improvement in cold flow behaviour and dimensional stability. This enables higher static pressure loads to be endured.

Murylon® 6 CAST has extremely low levels of residual stress thanks to the casting procedure used to produce it. This material is therefore ideally suited to extensively processed components.

# **SPECIAL PROPERTIES**

- Improved compressive strength
- Excellent cold flow behaviour
- Increased rigidity
- Better dimensional stability than other Murylon® materials
- Can be used at higher temperatures (+120°C)
- Low moisture absorption

# **POSSIBILITIES OF USE**


Highly stressed load-bearing machine parts

# **SPECIAL PROPERTIES**

- Good impact resistance
- Low cold flow characteristics
- Optimized wear properties (similar to those of Murylon® A)
- Low residual stress
- Flexible production of large-volume products possible
- Good fatigue strength

- Runners
- Slide elements
- Parts subject to high impacts
- Cog and chain wheels
- Pulleys



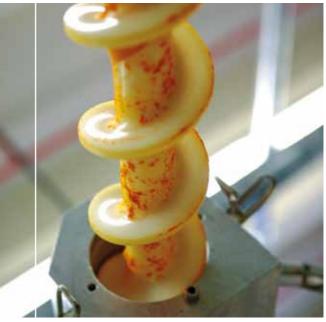

# MURDOPOL®

The main advantage of this material is its fantastic ability to create firm plastic/metal connections. This is made possible by the casting procedure used in its production, which involves casting around a steel core. The plastic and metal cutting deformation provides an absolutely accurate rotation for cog wheels and rollers. Murdopol® has extremely high shock and impact resistance characteristics and good emergency running characteristics thanks to its high wear resistance.

### **SPECIAL PROPERTIES**

- Good shock and impact resistance
- Low residual stress
- Metal core surrounded by cast plastic available
- Good damping and vibration behaviour
- Lowest moisture absorption of all polyamides
- Good resistance to chemicals
- Dimensionally stable

- Cog wheels with steel core
- Pulleys
- Humid usage sites
- Parts subject to high impacts
- Cam disks and sprockets



# MURYTAL® C MURYTAL® C natural [FS] MURYTAL® C blue [FS] 🛍 👼



Thanks to their extremely low absorption of moisture, Murytal® materials are ideally suited for use as electronic isolation components. A fine crystalline structure and high yield strength mean that Murytal® C has a high ability to regain its original form.

Provided with the same properties as Murytal® C natural, the blue plastic is ideal for use in the food sector thanks to its colour.

### **SPECIAL PROPERTIES**

# High rigidity

- Excellent ability to regain its form
- Extremely good electric isolation properties
- Practically no moisture absorption
- Good resistance to chemicals (pH 4 - 13)
- Approved for use in the food industry (EU and FDA) (Natural)
- Extremely good machinability
- Hydrolysis resistant to 80°C

### **SPECIAL PROPERTIES**

- High rigidity
- Excellent ability to regain its form
- Extremely good electric isolation properties
- Practically no moisture absorption
- Good resistance to chemicals (pH 4 - 13)
- Approved for use in the food industry (EU and FDA)
- Extremely good machinability
- Hydrolysis resistant to 80°C

# **POSSIBILITIES OF USE** FOR ALL MURYTAL® MATERIALS

- Slide elements
- Cog wheels
- Cams
- Snap-on connections





# MURYTAL® H

# MURYTAL® ESD

In addition to the excellent properties of Murytal® C, Murytal® H is stronger and more rigid with a lower expansion coefficient.

Additives make this material conductive. The mechanical properties of the material are retained almost in their entirety.

# **SPECIAL PROPERTIES**


- Higher rigidity than Murytal® C
- Excellent ability to regain its form
- Extremely good electric isolation properties
- Practically no moisture absorption
- Good resistance to chemicals (pH 4 9)
- Approved for use in the food industry (EU and FDA)
- Extremely good machinability

### **SPECIAL PROPERTIES**

■ Suitable for devices and machines subject to Directive 94/9/EC (ATEX 95)

# POSSIBILITIES OF USE FOR ALL MURYTAL® MATERIALS

- Slide elements
- Cog wheels
- Cams
- Snap-on connections

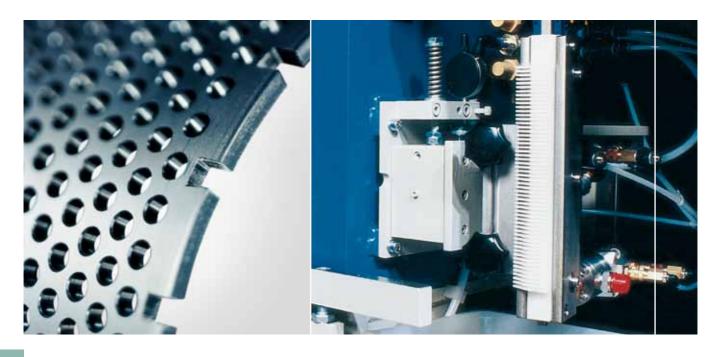



# MURYLAT® SP (FS) (III) (III)



Thanks to its extremely low absorption of moisture and low expansion coefficient, Murylat® is ideally suited for the processing of precision parts. Murylat® has an extremely high hardness grade and can withstand extreme static stresses exceptionally well.

Murylat® SP combines the properties of Murylat® with improved wear and friction characteristics. It also has increased dynamic resilience which, for example, significantly reduces the required drive power for your plants. This is made possible by the homogeneous distribution of solid lubricant.

### POSSIBILITIES OF USE FOR MURYLAT®

- Machine parts with narrow tolerances
- Bearing and transmission elements
- Highly stressed chain guide rails
- Chain wheels

### **SPECIAL PROPERTIES**


- High creep strength even at high temperatures
- Very good dimensional stability
- Low moisture absorption
- Approved for use in the food industry (EU and FDA) (Natural)
- Extremely good electric isolation properties

### **SPECIAL PROPERTIES**

- Increased wear resistance
- Better slide properties
- High creep strength even at high temperatures
- Very good dimensional stability
- High dynamic load-bearing capacity
- Low moisture absorption
- Approved for use in the food industry (EU and FDA)

# POSSIBILITIES OF USE FOR MURYLAT® SP

- Wear-resistant, highly stressed slide elements with narrow tolerances
- Bushes/sliding bearings
- Guides

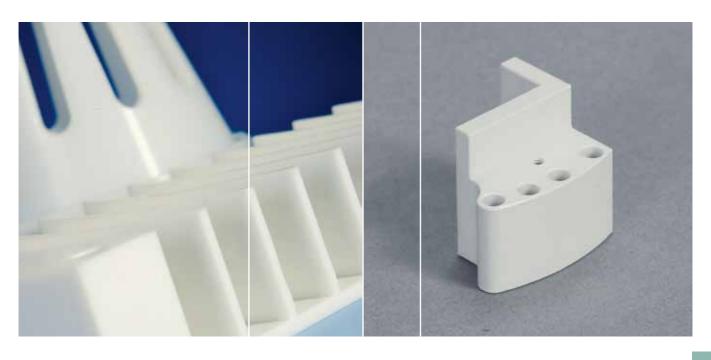




The use of this highly temperature-resistant polyamide enables reliable operation up to a constant service temperature of +155°C. The material retains its rigidity and creep strength over the entire temperature range far better than other Murylon® types. Thanks to its increased resistance against oxidative degradation, it is usually used in applications at above +80°C.

# **SPECIAL PROPERTIES**

- Highly wear-resistant and good slide properties, especially at high temperatures
- Good resistance to thermal aging
- High creep resistance

- Sliding bearings
- Chain guide rails and guides for use at high temperatures

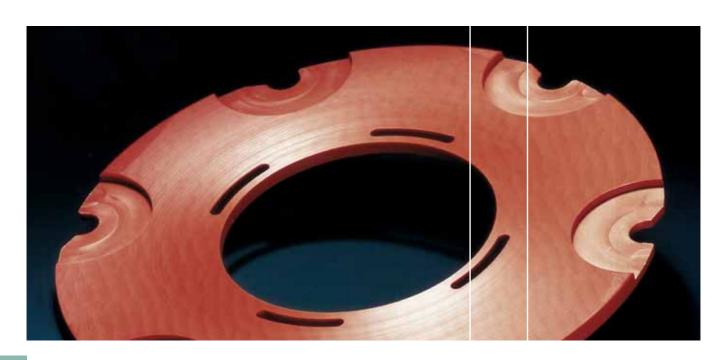

# MURINYL®

This material is ideally suited for use in the food sector and medical industry. As a fluorinated plastic, Murinyl® is exceptionally resistant to chemicals, hydrolysis, and sterilization. Moreover, the properties of the material change very little even at high service temperatures and after long-term exposure to UV radiation, meaning that Murinyl® is ideally suited for a wealth of applications both inside and outside.

### SPECIAL PROPERTIES

- Good wear resistance
- Good rigidity
- Higher compressive strength than Murflor®
- High constant service temperature
- Good resistance to chemicals
- Resistant to sterilization
- No stress corrosion possible
- Very good resistance to UV rays and adverse weather conditions
- No moisture absorption
- Approved for use in the food industry (EU and FDA)

- Construction of chemical apparatus
- Valve and pump parts
- Pharmaceutical and food sectors



# MURFLOR®

Murflor® materials are ideally suited to use in applications that require an excellent resistance to chemicals and heating steam. Murflor®'s working range starts at -200°C and can extend to +260°C with no mechanical load. Murflor® also has the lowest dynamic friction coefficient of all thermoplastics.

# **SPECIAL PROPERTIES**

- Best dynamic friction properties of all thermoplastics
- No stick/slip effect
- Very good anti-adhesion properties
- Electrically isolating
- Very high resistance to chemicals
- Very high resistance to hydrolysis
- Very tough, even at low temperatures
- Approved for use in the food industry (FDA)

- Construction of chemical apparatus
- Sliding guides and seals for use at high temperatures
- Slide bearings



# MURFLOR® + Carbon

# MURFLOR® + Bronze

The integration of 25% carbon increases the wear resistance, hardness, and creep strength of this material. Murflor®+Carbon is used, for example, when electrical conductivity is required and Material "S"® Black Antistatic cannot be used because the ambient temperature is too high.

The addition of 60% bronze to the base material reduces the expansion coefficient and gives lower sliding wear.

# **SPECIAL PROPERTIES**

- Higher wear resistance than Murflor®
- Very good slide properties
- Low stick/slip effect
- Electrically conductive
- Suitable for devices and machines subject to Directive 94/9/EC (ATEX 95)

# **POSSIBILITIES OF USE**


Sliding guides and slide bearings

# **SPECIAL PROPERTIES**

- Lower sliding wear than Murflor®
- **■** Good slide properties
- Low stick/slip effect
- Higher compressive strength than Murflor®

# **POSSIBILITIES OF USE**

■ Sliding guides and slide bearings

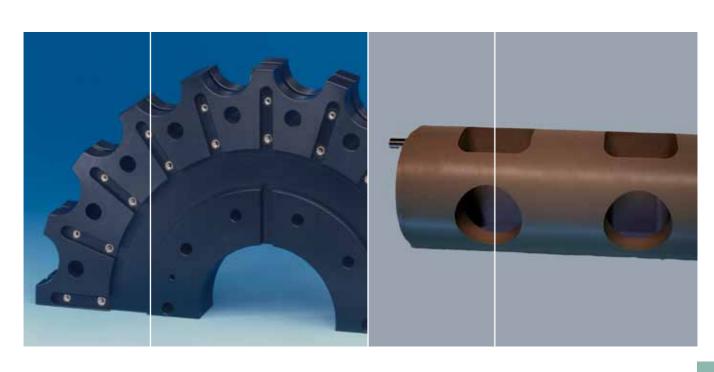





Thanks to the low fibre content and integrated solid lubricant, this high-performance material offers an excellent combination of good slide and wear behaviour, high strength, and dimensional stability – even at high temperatures. Murinit® SP also has a good resistance to chemicals and hydrolysis.

# **SPECIAL PROPERTIES**

- High wear resistance
- **■** Good slide properties
- Good resistance to chemicals and hydrolysis
- Excellent creep and compressive strength
- **■** Good electrical isolation properties
- Low thermal expansion coefficient
- Approved for use in the food industry (EU and/or FDA)

- Wear parts subject to temperature stress
- Slide elements








In comparison with other thermoplastics, Murpec® has an exceptionally low thermal expansion coefficient. This property provides optimum dimensional stability and means that dimensions do not change even if used in wet environments. Because of the high glass transition temperature, the material's rigidity and strength are retained almost in their entirety even at high temperatures. Murpec® materials are extremely resistant to deformation and exceptionally abrasion-proof.

# **SPECIAL PROPERTIES**

- High wear resistance
- Low expansion coefficient
- **■** Electrically isolating
- High temperature resistance
- Flame-resistant
- High compressive strength
- High resistance to energy radiation
- Excellent resistance to chemicals and heating steam
- Approved for use in the food industry (EU and/or FDA)

- Sliding guides
- Cog wheels
- Parts subject to temperature stress

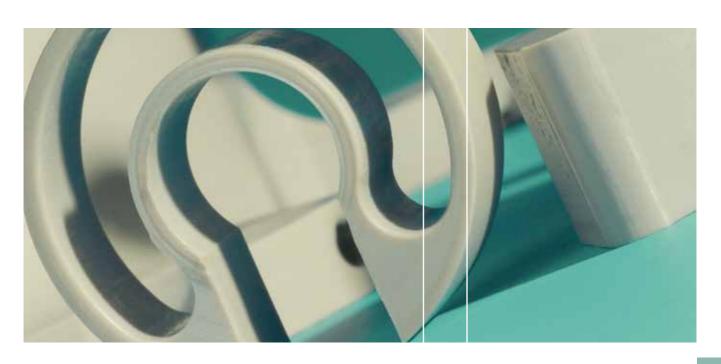

# MURPEC® SP

Modified Murpec® SP provides excellent slide properties in addition to good mechanical properties. This material variant also offers improved wear behaviour due to its special additives.

# **SPECIAL PROPERTIES**

- Better slide properties
- Increased wear resistance
- Very low expansion coefficient
- **■** High temperature resistance
- **■** Flame-resistant
- High compressive strength
- High resistance to energy radiation
- Excellent resistance to chemicals and heating steam

- Highly-stressed wear parts
- Sliding guides
- Slide bearings

